






型号 Model No.	Dimensions														
	d	l	Da	D	A	B	L	W	X	H	Q	n	Ca	Coa	K
SFU01204-4	12	4	2.5	24	40	10	40	32	4.5	30		4	593	1129	12.5
SFU01604-4		4	2.381	28	48	10	40	38	5.5	40	M6	4	629	1270	35
SFU01605-4	16	5	3.175	28	48	10	50	38	5.5	40	M6	4	780	1790	20
SFU01610-3		10	3.175	28	48	10	57	38	5.5	40	M6	3	721	1249	15
SFU02004-4		4	2.381	36	58	10	42	47	6.6	44	M6	4	699	1617	41
SFU02005-4	20	5	3.175	36	58	10	51	47	6.6	44	M6	4	1130	2380	25
SFU02504-4		4	2.381	40	62	10	42	51	6.6	48	M6	4	777	2052	48
SFU02505-4		5	3.175	40	62	10	51	51	6.6	48	M6	4	1280	3110	35
SFU02506-4	25	6	3.969	40	62	10	54	51	6.6	48	M6	4	1528	3284	40
SFU02508-4		8	4.762	40	62	10	63	51	6.6	48	M6	4	1941	3863	38
SFU02510-4		10	4.762	40	62	12	85	51	6.6	48	M6	4	1944	3877	33
SFU03204-4		4	2.381	50	80	12	44	65	9	62	M6	4	871	2661	56
SFU03205-4		5	3.175	50	80	12	52	65	9	62	M6	4	1450	4150	40
SFU03206-4	32	6	3.969	50	80	12	57	65	9	62	M6	4	1720	4298	47
SFU03208-4		8	4.762	50	80	12	65	65	9	62	M6	4	2189	5079	44
SFU03210-4		10	6.350	50	80	12	90	65	9	62	M6	4	3390	7170	79
SFU04005-4		5	3.175	63	93	14	55	78	9	70	M8	4	1610	5330	49
SFU04006-4	40	6	3.969	63	93	14	60	78	9	70	M6	4	1911	5458	55
SFU04008-4		8	4.762	63	93	14	67	78	9	70	M6	4	2435	6469	52
SFU04010-4		10	6.350	63	93	14	93	78	9	70	M8	4	3910	9520	50
SFU05010-4		10	6.350	75	110	16	93	93	11	85	M8	4	4450	12500	65
SFU05020-4	50	20	7.144	75	110	16	138	93	11	85	M8	4	4644	14327	59.5
SFU06310-4		10	6.350	90	125	18	98	108	11	95	M8	4	5070	16000	80
SFU06320-4	63	20	9.525	95	135	20	149	115	13.5	100	M8	4	7573	23860	84.1
SFU08010-4		10	6.350	105	145	20	98	125	13.5	110	M8	4	5620	21300	90
SFU08020-4	80	20	9.525	125	165	25	154	145	13.5	130	M8	4	8485	30895	84.1
SFU10020-4	100	20	9.525	150	202	30	180	170	17.5	155	M8	4	9420	39183	110.1

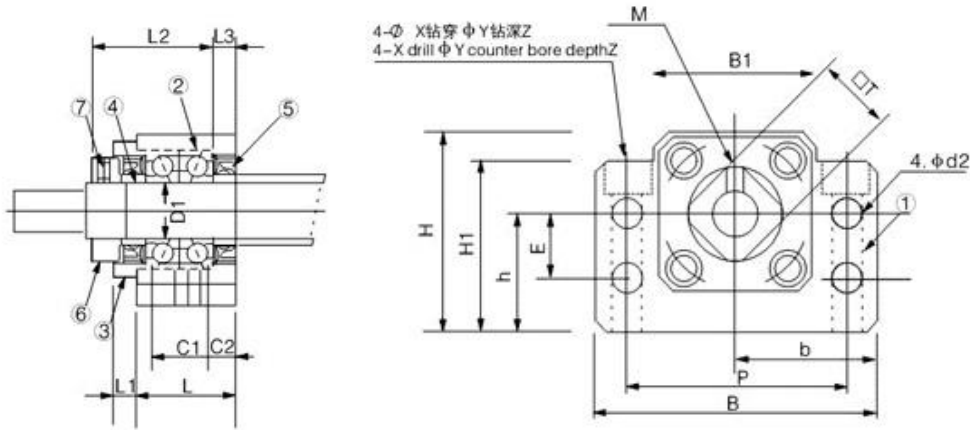

Model No.	Shaft diameter d1	L	L1	L2	L3	B	H	B	h	B1	H1	E	P	C1	C2	d2	X	Y	Z	M	T
								±0.02	±0.02												
BK12	12	25	6	29	5	60	43	30	25	35	32.5	18	46	13	6	5.5	6.6	11	1.5	M3	19
BK15	15	27	6	32	6	70	48	35	28	40	38	18	54	15	6	5.5	6.6	11	6.5	M3	22
BK17	17	35	9	44	7	86	64	43	39	50	55	28	68	19	8	6.6	9	14	8.5	M4	24
BK20	20	35	8	43	8	88	60	44	34	52	50	22	70	19	8	6.6	9	14	8.5	M4	30
BK25	25	42	12	54	9	106	80	53	48	64	70	33	85	22	10	9	11	17.5	11	M5	35
BK30	30	45	14	61	9	128	89	64	51	76	78	33	102	23	11	11	14	20	13	M6	40
Bk35	35	50	14	67	12	140	86	70	52	88	79	35	114	26	12	11	14	20	13	M8	50

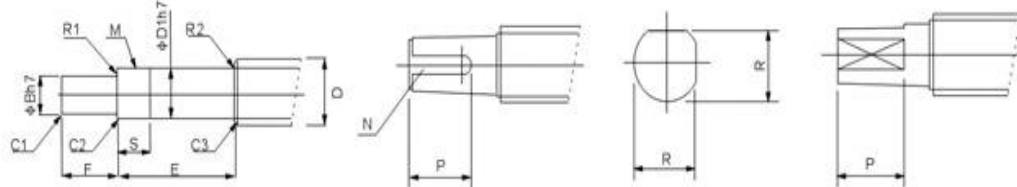

MODEL NUBER BK TYPE	Ball screw outside diameter D	D1	B	E	F	M	S	Chamfer			Radius		H1 KEYWAY DIMENSION		H2		MODELNUBER BK TYPE
								C1	C2	C2	R1	R2MAX	N	P	R	P	
BK12	φ 14, φ 15, φ 16, φ 18	12	10	39	15	M12X4	14	0.5	0.5	0.5	0.3	0.3	3X1.8	12	9.5	12	BK12
BK15	φ 18, φ 20	15	12	40	20	M15X1	12	0.5	0.5	0.5	0.3	0.3	4X2.5	16	11.3	16	BK15
BK17	φ 20, φ 25	17	15	53	23	M17X1	17	0.5	0.5	0.5	0.3	0.3	5X3.0	21	14.3	21	BK17
BK20	φ 25, φ 28	20	16	53	25	M20X1	15	0.5	0.5	0.5	0.3	0.3	5X3.0	21	16	21	BK20
BK25	φ 32, φ 36	25	20	65	30	M25X1.5	18	0.5	0.7	1	0.5	0.5	6X3.5	25	19	25	BK25
BK30	φ 36, φ 40	30	25	72	38	M30X1.5	25	0.5	0.7	1	0.5	0.5	8X4.0	32	23.5	32	BK30
Bk35	φ 40, φ 45, φ 50	35	30	83	45	M35X1.5	28	0.5	1	1	0.5	0.5	8X4.0	40	28.5	40	Bk35

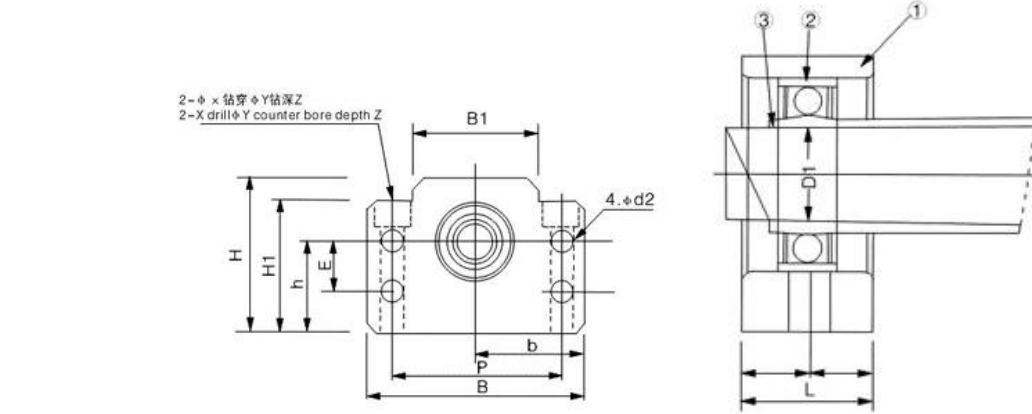

Technical drawing of a shaft-hub assembly. The shaft has a diameter of ϕD and a tolerance of $+0.2$ $C0$. The hub has an inner diameter of ϕA with a tolerance of 0 $B0$ and an outer diameter of $\phi D1h7$. The assembly length is E . The shaft is shown with a dashed line indicating its extension.

MODELNUBER BF TYPE	Ball screw outside diameter D	D1	E	Locating snap ring			MODELNUBER BF TYPE
				A	B	c	
BK-12	¢ 14, ¢ 15, ¢ 16	10	11	9.6	1.15	9.15	BF-12
BK-15	¢ 18, ¢ 20	15	13	14.3	1.15	10.15	BF-15
BK-17	¢ 20, ¢ 25	17	16	16.2	1.15	13.15	BF-17
BK-20	¢ 25, ¢ 28	20	16	19	1.35	13.35	BF-20
BK-25	¢ 32, ¢ 36	25	20	23.9	1.35	16.35	BF-25
BK-30	¢ 36, ¢ 40	30	21	28.6	1.75	17.75	BF-30
BK-35	¢ 40, ¢ 45, ¢ 50	35	22	33	1.75	18.75	BF-35



구분 Model No	Dimensions															
	d	l	Da	D	A	E	B	L	X	W	H	Q	n	Ca	Coa	K
SFE01616-3	16	16	2.778	32	53	10.1	10	38	4.5	42	34	M6	1.7x2	650	1280	19
SFE01616-6		16	2.778	32	53	10.1	10	38	4.5	42	34	M6	1.7x4	1180	2550	36
SFE01632-3	16	32	3.175	34	55	10.5	10	34	5.5	45	36	M6	0.7x2	410	680	21
SFE01632-6		32	3.175	34	55	10.5	10	34	5.5	45	36	M6	0.7x4	820	1360	41
SFE02020-3	20	20	3.175	39	62	11.5	10	47	5.5	50	41	M6	1.7x2	980	2140	25
SFE02020-6		20	3.175	39	62	11.5	10	47	5.5	50	41	M5	1.7x4	1780	4280	49
SFE02040-3	20	40	3.175	38	58	11	10	41	5.5	48	40	M6	0.7x2	455	880	25
SFE02040-6		40	3.175	38	58	11	10	41	5.5	48	40	M6	0.7x4	910	1760	49
SFE02525-3	25	25	3.969	47	74	13	12	57	6.6	60	49	M6	1.7x2	1470	3350	31
SFE02525-6		25	3.969	47	74	13	12	57	6.6	60	49	M6	1.7x4	2660	6690	60
SFE02550-3	25	50	3.969	46	70	13	12	50	6.6	58	48	M6	0.7x2	685	1380	31
SFE02550-6		50	3.969	46	70	13	12	50	6.6	58	48	M6	0.7x4	1370	2760	60
SFE03232-3	32	32	4.762	58	92	16	12	71	9	74	60	M6	1.7x2	2140	5260	40
SFE03232-6		32	4.762	58	92	16	12	71	9	74	60	M6	1.7x4	3890	10500	76
SFE03264-3	32	64	4.762	58	92	15.5	12	62	9	74	60	M6	0.7x2	1000	2130	40
SFE03264-6		64	4.762	58	92	15.5	12	62	9	74	60	M6	0.7x4	2000	4260	77
SFE04040-3	40	40	6.350	73	114	19	15	89	11	93	75	M6	1.7x2	3410	8820	49
SFE04040-6		40	6.350	73	114	19	15	89	11	93	75	M6	1.7x4	6200	17600	95
SFE05050-3	50	50	7.938	90	135	21.5	20	107	14	112	92	M6	1.7x2	5100	13800	60
SFE05050-6		50	7.938	90	135	21.5	20	107	14	112	92	M6	1.7x4	7260	27600	117